

Research for Frequency Products

Description

Time Base Frequency 32768Hz (1x2¹⁵) tuning fork Quartz Crystal Unit. SEAM seal ceramic package under vacuum environment. This crystal is suitable for RTC, Smart Meter, AIoT, Wearables, Watches, Tablet. Parabolic curve of temperature co-efficient. Parts are supplied 3000pcs in tape and reel as standard.

Features


SMD Ceramic type for high population assembly
Ultra light weight and thin package
High stable with vacuum sealing

RoHS Complaint


Standard Parameters

Parameter	Specifications
Frequency Range	32.768KHz
Vibration Mode	Fundamental
Frequency Tolerance @25°C	±20ppm
Frequency Stability vs Temp Range	-0.04ppm/°C ² Max.
Operating Temp. Range	-40 ~ +85 °C
Load Capacitance	12.5pF (std)
Drive Level	1.0μW Max.
Shunt Capacitance	2.0pF Max.
Equivalent Series Resistance	90,000Ω Max.
Aging per year	±3ppm
Storage Temp. Range	-40 ~ 125 °C


Frequency vs Temp. Deviation Characteristics

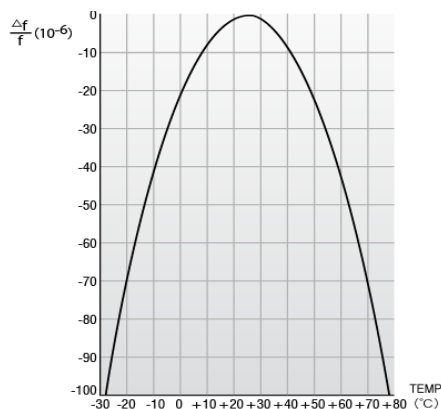


Quartz Crystal Tuning Fork
SMD 1.6x1.0x0.5mm
32.768KHz




Outline and Dimensions

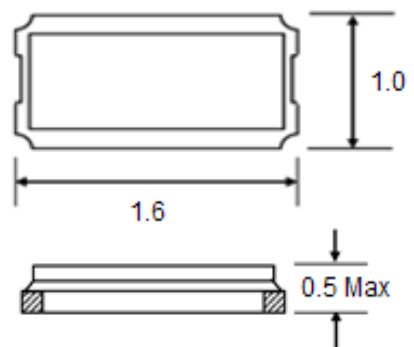

Bottom View

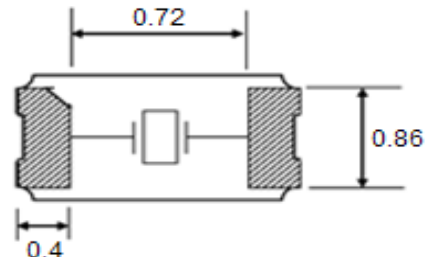

Land Pattern

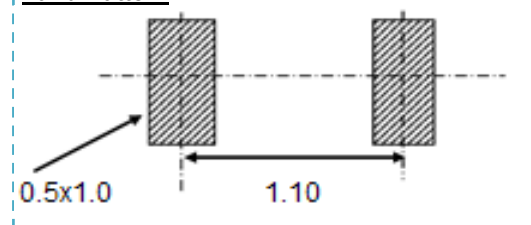

CALTRON DEVICES LTD.



www.caltron.com.hk

(852) 24223407

sales@caltron.com.hk

Subject to change without notice