

## Research for Frequency Products

### Description

Time Base Frequency 32768Hz (1x2<sup>15</sup>) tuning fork Quartz Crystal Unit. SEAM seal ceramic package under vacuum environment. This crystal is suitable for RTC, Smart Meter, AIoT, Wearables, Watches, Tablet. Parabolic curve of temperature co-efficient. Parts are supplied 3000pcs in tape and reel as standard.

### Features


SMD Ceramic type for high population assembly  
Ultra light weight and thin package  
High stable with vacuum sealing

### RoHS Complaint


### Standard Parameters

Parameter	Specifications
Frequency Range	32.768KHz
Vibration Mode	Fundamental
Frequency Tolerance @25°C	±20ppm
Frequency Stability vs Temp Range	-0.04ppm/°C <sup>2</sup> Max.
Operating Temp. Range	-40 ~ +85 °C
Load Capacitance	12.5pF (std)
Drive Level	1.0μW Max.
Shunt Capacitance	2.0pF Max.
Equivalent Series Resistance	90,000Ω Max.
Aging per year	±3ppm
Storage Temp. Range	-40 ~ 125 °C


### Frequency vs Temp. Deviation Characteristics

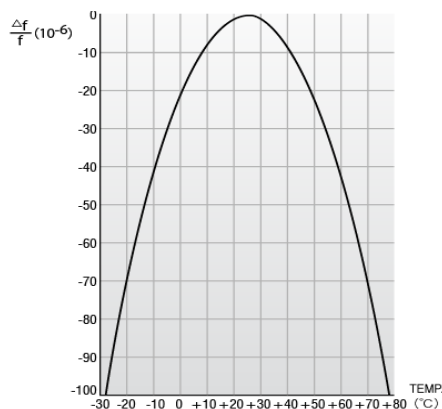



**Quartz Crystal** Tuning Fork  
SMD 2.0x1.2x0.6mm  
32.768KHz



### Outline and Dimensions

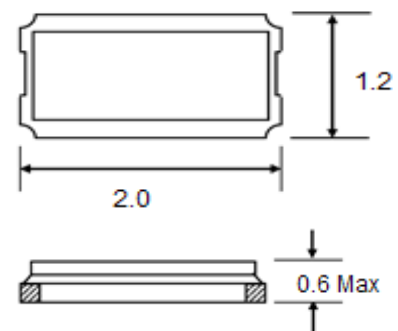

### Bottom View

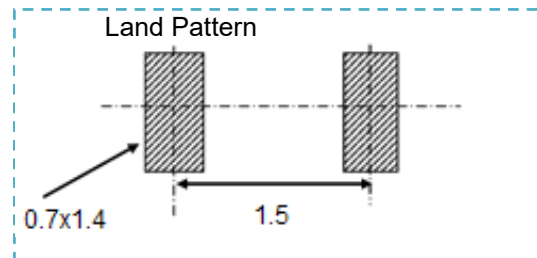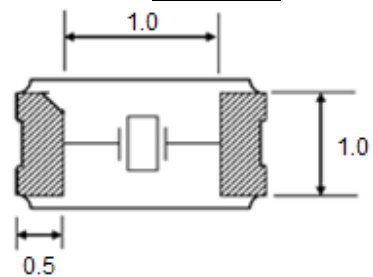

**CALTRON DEVICES LTD.**



[www.caltron.com.hk](http://www.caltron.com.hk)

(852) 24223407

[sales@caltron.com.hk](mailto:sales@caltron.com.hk)

Subject to change without notice